SCALE-PRO

10.3" x 2.8" x 2.8" (26.2cm x 7.1cm x 7.1cm)



- System maximum operating pressure is 125 psi (862 kPa) and operating temperature 100°F (38°C)
- 3/4" NPT stainless steel connections easily adapt to most plumbing systems. (Kit 39000.0101 available with bushings to reduce to 3/8" and 1/4" NPT)
- FDA-CFR and NSF compliant materials
- Engineered force feeding orifice accurately controls feed rate without overdosing
- Reduces lime scale formation from hard water in applications where water is either heated or evaporated
- Recommended for use in combination with an EQHP10, 25, 54 (non-L) system
- · Suggested cartridge change-out is every 6 months
- Working flow rate of 6gpm (22Lpm) accommodates most high temperature foodservice equipment
- Proprietary scale inhibitor does not break down at temperatures above 200°F (93.3°C)
- System extends the life and increases the efficiency of coffee brewers, espresso machines and steamers

Agency:

Specifications

Product #: 39000.0010

Cartridge Type: Quick Change

Additional Features


Capacity


| Service Flow Rate | Capacity | Micron Rating |
|--------------------------|----------|------------------|
| 6.0 gal/min (22.7 L/min) | | - |

Plumbing Requirements

| Max Operating | Max Operating | Inlet | Outlet | |
|-------------------|---------------|------------|------------|--|
| Pressure | Temperature | Connection | Connection | |
| 125 psi (862 kPa) | 100°F(38°C) | 3/4 IN NPT | 3/4 IN NPT | |



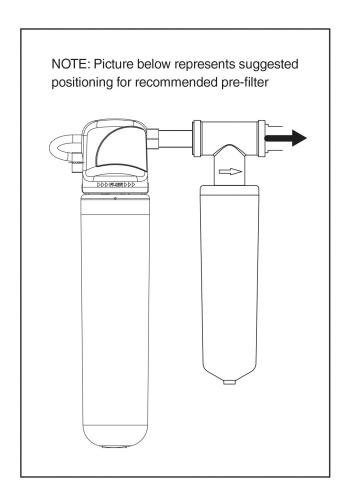

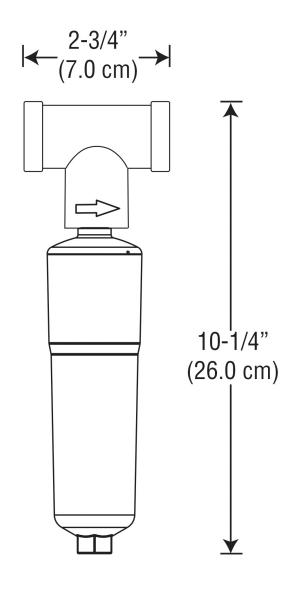

Scale-Pro

| Unit | | | Shipping | | | | | |
|---------|---------|----------|----------|-------|--------|-------|-----------|--------|
| | Width | Height | Depth | Width | Height | Depth | Weight | Volume |
| English | 2.8 in. | 10.3 in. | 2.8 in. | - | - | - | 2.150 lbs | - |
| Metric | 7.1 cm | 26.2 cm | 7.1 cm | - | - | - | 0.975 kgs | - |



Related Products & Accessories: SCALE-PRO(39000.0010)









