Crescendo®, 120V 60Hz

Height: 31.3" Width: 14.1" Depth: 18.9" (79.5cm) (35.8cm) (48.0cm)



- Precision burrs are used for clean-cut milling of the beans and assurance of superior grounds production
- Engineered with three powder hoppers: two 3.3 lb (1.5 kg) hoppers for larger demand flavors and one 2.2 lb (1 kg) hopper for an additional selection
- Prominent 2.2 lb (1 kg) bean hopper allows for full visibility of fresh whole beans
- Spent pucks are automatically deposited in a 70-puck capacity holding bin: optionally, spent pucks may be eliminated via a through-counter chute
- Touchpad features two programmable portion sizes of 8 to 12 oz (230 to 350 ml) each, up to nine beverage choices, plus hot water
- Compact footprint
- Bright, high-visibility nozzle defines the 5.5" (140.5 mm) height of the dispense area
- Tamping sensor ensures consistently excellent coffee puck compaction
- 9 bar pressure assures optimal extraction and, coupled with a variable brew group, produces superb single or double shots, each finished with a handsome crema
- Adjustable speed auger motors deliver reliable performance, routinely fulfilling ingredient portioning requirements
- · Designed, engineered and assembled by BUNN in the USA
- Optional VirtualTOUCH technology allows users to hover their finger over a button to make a selection

Agency:





Additional Features

Hot Water Button

Specifications

Product #: 44300.6201 Water Access: Plumbed

Finish: Stainless/Black

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	11.0	1300	Yes	NEMA 5-15P	40	60°F (15.5°C)	1	2	60

When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

CAD Drawings

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	3/4" GHT	0.50	•		


MARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 09/30/2024

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

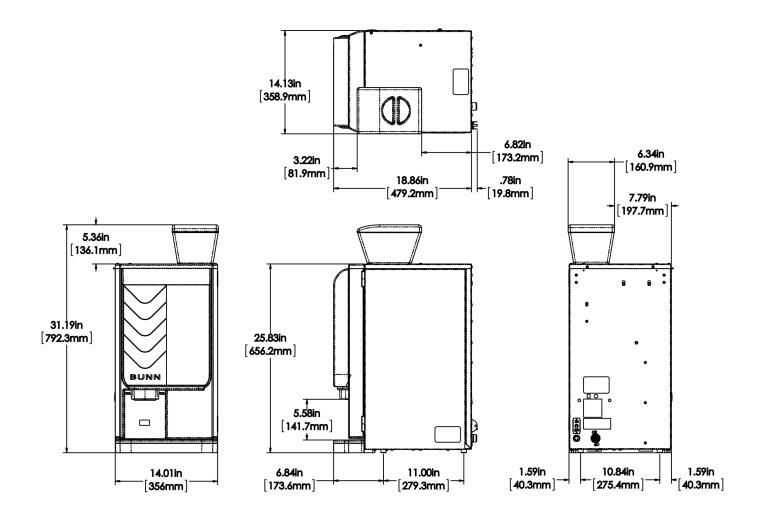

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	31.3 in.	14.1 in.	18.9 in.	38.0 in.	17.9 in.	25.9 in.	101.000 lbs	10.171 ft ³
Metric	79.5 cm	35.8 cm	48.0 cm	96.5 cm	45.4 cm	65.7 cm	45.814 kgs	0.288 m³



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 09/30/2024

 For most current specifications and other info visit bunn.com.
 09/30/2024

Related Products & Accessories:Crescendo®, 120V 60Hz(44300.6201)







BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last U the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. 09/30, For most current specifications and other info visit bunn.com.

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last Updated: the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. 09/30/2024 For most current specifications and other info visit bunn.com.