## ICB TWIN, 120/240V SST

baseless Thermofresh servers

programmed for display.

USB programming capable

Height: 26.9" Width: 20.2" Depth: 24.7" (68.3cm) (62.7cm) (51.3cm)



Server(s) sold separately

## **Specifications**

Product #: 53200.6100

Water Access: Plumbed

Interface: Wireless

Finish: Stainless

### **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
120/240	25	6000	-	-	280	60°F (15.5°C)	1	3	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine if the machine is marked with the before mentioned ratings.

## **Plumbing Requirements**

#### CAD Drawings

	<b>U</b>				<u> </u>	
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	3/8" Male Flare Fitting	1.00	•	•	•
•						

MARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 09/21/2023

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

• Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.

• Sleek modernized design language, with rounded angles on the corners and trunk

• Digital readout displays in English, Spanish, or French --- for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be

• BUNN Infusion Series technology allows for multiple recipes from one footprint ---

• The exclusive Peak Extraction® Sprayhead provides improved uniformity of

· Electronic funnel lock prevents removal of each brew funnel until drip- through is

Brews into 2.5 to 3.8L (84 to 128 oz)airpots and 3.8 to 5.7L (1 to 1.5 gallon)

Large 5.6 gallon (21.2L) tank provides back-to-back brewing capacity

· Energy-saver mode reduces tank temperature during idle periods

extraction and greater resistance to limescale buildup.

· Brew counter keeps track of how many batches are brewed

• Hot water faucet (supplied for custom installation)

with three brew buttons and two batch sizes

#### Agency:


Funnel: Black Plastic

complete





## Additional Features

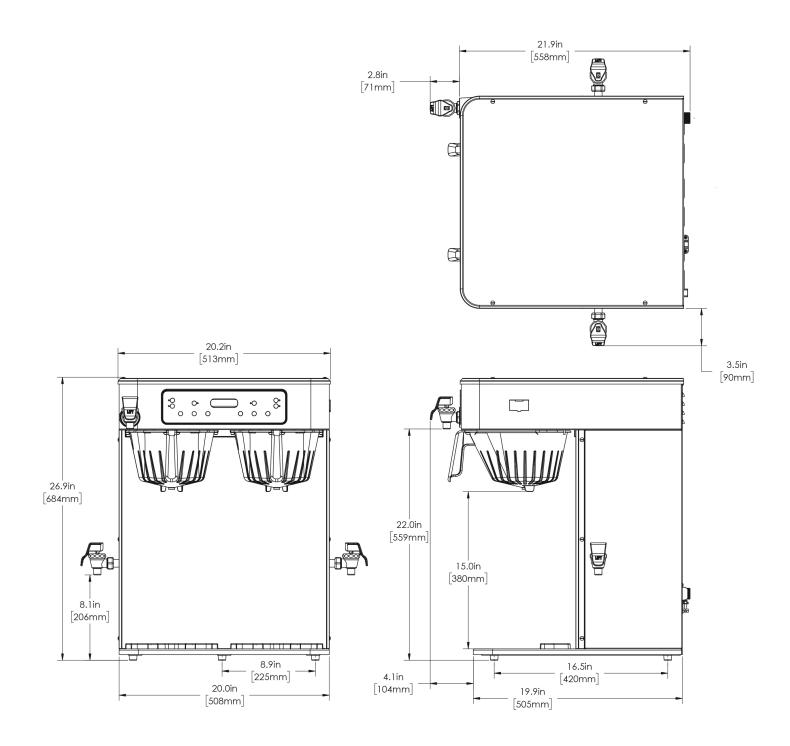

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	26.9 in.	20.2 in.	24.7 in.	30.0 in.	28.4 in.	28.4 in.	78.460 lbs	13.978 ft <sup>3</sup>
Metric	68.3 cm	51.3 cm	62.7 cm	76.2 cm	72.1 cm	72.1 cm	35.589 kgs	0.396 m³




 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 09/21/2023

 For most current specifications and other info visit bunn.com.
 09/21/2023

## Related Products & Accessories: ICB TWIN, 120/240V SST(53200.6100)

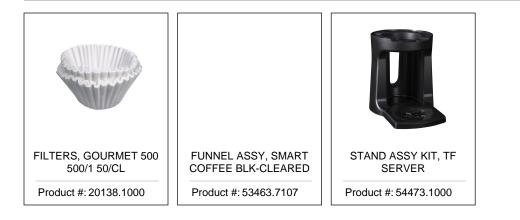



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 09/21/2023

 For most current specifications and other info visit bunn.com.
 09/21/2023

# Serving & Holding Options: ICB TWIN, 120/240V SST(53200.6100)



