



# SINGLE WELL, HEAVY-DUTY, BOTTOM MOUNT, ROUND & SQUARE CORNER RECTANGULAR DROP-IN FOOD WARMERS

MODELS: BM-30, BM-30D, BM-80, BM-80C, BM-80CD, BM-80CDUL, BM-80CUL, BM-80DUL



BM-30DS



BM-80D

APW Wyott BM-30 and BM-80 series Built-In Rectangular Food Warmers are designed for bottom mount installation and to hold heated foods at safe and fresh serving temperatures. APW Wyott BM-30 and BM-80 Series accommodates one 12" X 20" standard food pan or equivalent fractional inset pans. The BM-80 series are fully insulated; sides and bottom for quicker pre-heat, faster recovery and energy savings. Both are designed for wet or dry operation.

One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans are standard features on all models. BM-80 models are fully insulated around all 4-sides and bottom for quicker preheat, faster recovery and energy savings. Individual controls for each well provide maximum versatility. Models with thermostatic or infinite controls are available. High-limits prevent overheating. Temperature-ready indicator lights are standard on all control types. Powerful tubular heating elements are located under the warming pans for quick and efficient heating and for even heat distribution.

## OPTIONS

- 8oz. soup ladle
- Drain screens
- Drain valve extension kit, extension from drain to counter front with remote handle, for use with "D" models only.
- Square Corners only available on BM-80 Models.

## WARRANTY

- 1-Year Limited Parts & 1-Year Limited Labor Warranty

## CERTIFICATIONS


Certified by the following agencies:



## FEATURES AT A GLANCE

- All models accommodates one 12" X 20" standard inset pan or equivalent fractional pans
- One-piece stainless steel top flange and heavy-gauge, deepdrawn stainless steel warming pans
- Suitable for wet or dry operation (wet recommended for best results)
- Thermostatic or infinite controls
- Separate controls for each individual well
- High limits prevent overheating
- Thermostatic controls are recessed in a one-piece, drawn, front-mounted panel
- Powerful tubular heating elements
- ½" drains available

## EQUIPMENT DIMENSIONS

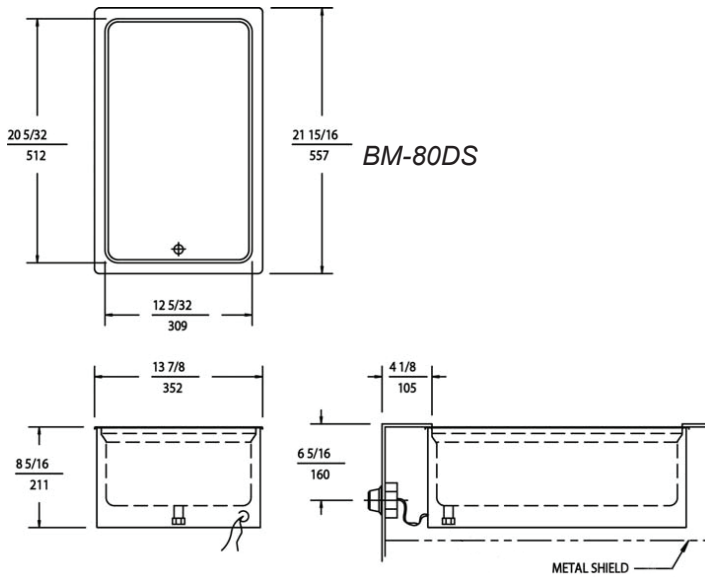

## REQUIRED CLEARANCES

Left	2" (51mm)	Back	2" (51mm)
Right	2" (51mm)	Bottom	6 3/4" (171mm)
Front	4 1/8" (105mm)		

## MECHANICAL SPECIFICATIONS

Model #	Drain	Watts	Voltage	Phase	Amps	Overall Dimensions	Control Panel Dimensions	Ship Weight (lbs. / Kilos)	Crate Size	Approvals
						Width x Height x Depth (inches / mm)	Width x Height (inches / mm)		Cubic Feet (Cubic Meters)	
BM-30S-120	No	1200	120	1	10	13.88" x 21.94" x 8.69" (352.4 x 557.2 x 221)	3.31 x 4.44 (84 x 113)	14 (6.4)	2.97 (0.084)	
BM-30S	No	1200	240	1	5	13.88" x 21.94" x 8.69" (352.4 x 557.2 x 221)	3.31 x 4.44 (84 x 113)	14 (6.4)	2.97 (0.084)	
BM-30DS-120	Yes	1200	120	1	10	13.88" x 21.94" x 8.69" (352.4 x 557.2 x 221)	3.31 x 4.44 (84 x 113)	14 (6.4)	2.97 (0.084)	
BM-30DS	Yes	1200	240	1	5	13.88" x 21.94" x 8.69" (352.4 x 557.2 x 221)	3.31 x 4.44 (84 x 113)	14 (6.4)	2.97 (0.084)	
BM-80S-120	No	1650	240	1	5	13.88" x 21.94" x 8.32" (352.4 x 557.2 x 211)	5.88 x 6.25 (149 x 159)	22 (10)	2.97 (0.084)	
BM-80DS-120	Yes	1200	120	1	10	13.88" x 21.94" x 8.32" (352.4 x 557.2 x 211)	5.88 x 6.25 (149 x 159)	22 (10)	2.97 (0.084)	
BM-80DS	Yes	1650	240	1	5	13.88" x 21.94" x 8.32" (352.4 x 557.2 x 211)	5.88 x 6.25 (149 x 159)	22 (10)	2.97 (0.084)	
BM-80DULS	Yes	1650	240	1	6.9	13.88" x 21.94" x 8.32" (352.4 x 557.2 x 211)	5.88 x 6.25 (149 x 159)	22 (10)	2.97 (0.084)	

Freight Class: 100

FOB: Smithville, 37166

APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.