

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

EHEI

E-Chef™ Hot Food Tables

Models

- EHEI36C 2 well hot food table on casters
- EHEI36C-208 2 well hot food table on casters, 208v
- EHEI48C 3 well hot food table on casters
- EHEI60C 4 well hot food table on casters
- EHEI74C 5 well hot food table on casters



EHEI36C

Standard Features

- Stainless steel top and sides
- Individual wells with infinite controls
- 8" polyethylene cutting board
- Drains, manifold and common gate valve
- Fill faucet (shipped loose for field installation - left or right)
- Stainless steel plate shelf
- Stainless steel bottom shelf with 3" riser at rear
- Standard with cord and plug

Options & Accessories

- Composite cutting boards
- Counter protectors
- Overshelves (1-2 tiers)
- Stainless steel back
- Individual gate valves
- Cord and plug (leg models)
- 208V electrical (EHEI36L and C)

Specifications

Exterior: Top is one-piece heavy-gauge stainless steel with integral 2.12" square nosing on front with 90° turn down at the rear. Sides are heavy-gauge single thickness stainless steel with 2" bends on front and rear.










Top: Top is available with (2) to (5) 11.87" x 19.87" sealed individual wells to accommodate 12"x20" pans 6" deep. Each well is constructed of heavy-gauge stainless steel with 1/2" drains. Drains are manifolded together with common gate valve. Each well is individually controlled by infinite controls.

Controls are mounted on the front of the stainless steel plate shelf. Each well has a 1000 watt heating element with high limit safety switches.

Interior: Bottom shelf is heavy-gauge stainless steel with 3" high riser at the rear. 7" heavy-gauge stainless steel plate shelf on the front of the unit.

Electrical: (2) well units are standard with 120V or 208V electrical. (3) to (5) well units are standard with 208V electrical. All models are standard with relevant NEMA cord and plug.



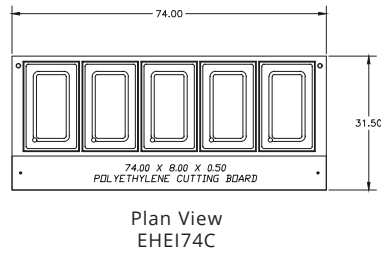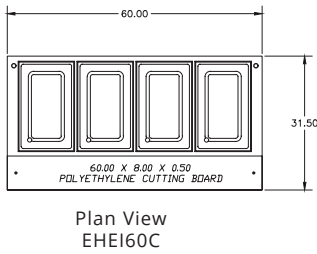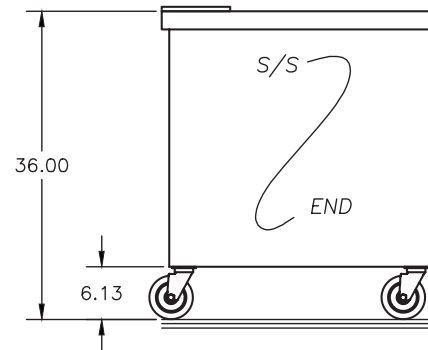

| Specifications | | | | | | | | | | |
|----------------|-----|-------|-----|---|---------|-----------|----|---|-------|-----|
| EHEI36C | 36" | 31.5" | 36" | 2 | 120 | 17.0 | 60 | 1 | 5-30P | 250 |
| EHEI36C-208 | 36" | 31.5" | 36" | 2 | 208 | 10.0 | 60 | 1 | 6-20P | 250 |
| EHEI48C | 48" | 31.5" | 36" | 3 | 208/230 | 15.0/16.0 | 60 | 1 | 6-20P | 280 |
| EHEI60C | 60" | 31.5" | 36" | 4 | 208/230 | 20.0/22.0 | 60 | 1 | 6-30P | 310 |
| EHEI74C | 74" | 31.5" | 36" | 5 | 208/230 | 24.0/27.0 | 60 | 1 | 6-50P | 350 |

Welbilt reserves the right to make changes to the design or specifications without prior notice.