



KELT SERIES

Electric Floor Mounted Tilting
 $\frac{2}{3}$ Jacketed Kettles



Model K40ELT



ANSI/NSF Standard #4



SPECIFIER STATEMENT

Electric self-contained, stainless steel, $\frac{2}{3}$ jacketed floor mounted tilting steam kettle. Ellipsoidal bottom kettle liner formed and fully welded type 316 and type 304 stainless steel exterior with ($\frac{1}{4}$ x $\frac{5}{8}$ inch 20 gallons) ($\frac{3}{8}$ x 1 inch 40 gallons and greater) bar rim, embossed gallon/liter markings. 50 psi (3.4 kg/cm²) steam jacket rating. Stainless steel enclosure for controls, self-locking tilt mechanism and faucet bracket. Controls include a power switch, power “on” light, solid state temperature control, vacuum/pressure gauge, pressure relief valve, low water light and low water shut-off. Kettle tilts forward 90° to completely empty. Tubular stainless steel legs with flanged feet.

UL listed. UL Classified for sanitation in accordance with ANSI/NSF Standard #4. Meets ASME code.

Project _____

AIA # _____ SIS # _____

Item # _____ Quantity _____ C.S.I. Section 114000

MODELS

- ☐ **K20ELT** 12 KW, 20 gallon true working capacity
- ☐ **K40ELT** 18 KW, 40 gallon true working capacity
- ☐ **K60ELT** 18 KW, 60 gallon true working capacity

STANDARD FEATURES

- Electric self-contained, stainless steel, $\frac{2}{3}$ jacketed floor mounted tilting steam kettle
- Ellipsoidal bottom kettle liner formed and fully welded standard type 316 and type 304 stainless steel exterior
- Heavy bar rim ($\frac{1}{4}$ x $\frac{5}{8}$ inch 20 gallons) ($\frac{3}{8}$ x 1 inch 40 gallons and greater)
- Embossed gallon/liter markings
- 50 psi (3.4 kg/cm²) steam jacket rating
- Stainless steel enclosure for “water resistant” controls, self-locking tilt mechanism and faucet bracket
- Controls include a power switch, power “on” light, solid state temperature control, vacuum/pressure gauge, pressure relief valve, low water light and low water shut-off
- Kettle tilts forward 95° to completely empty
- Tubular stainless steel legs with flanged feet
- One year limited parts and labor warranty

OPTIONS

- ☐ Two inch compression tangent draw-off valve with perforated strainer
- ☐ Two inch plug tangent draw-off valve with perforated strainer
- ☐ Three inch compression tangent draw-off valve with perforated strainer
- ☐ Security facility package:
 - a. Security type fasteners with tack welds
 - b. Stainless steel step over draw-off valve with chain
 - c. Controls cover
 - d. Chained crank handle
- ☐ 480 volt, 60 Hz, 3 phase power supply
- ☐ Second year extended limited parts and labor warranty

ACCESSORIES (PACKAGED AND SOLD SEPARATELY)

- ☐ Spring assist hinged stainless steel cover with condensate ring and drop down lift handle
- ☐ Pouring lip strainer
- ☐ Clean-up kit, includes draw-off brush, clean-up brush and paddle scraper with 40" handle
- ☐ Stainless steel 48" whip
- ☐ Non-perforated strainer
- ☐ (12") (18" double jointed) single pantry lead-free faucet
- ☐ (12") (18" double jointed) double pantry lead-free faucet
- ☐ Double pantry washdown hose with 16" add-on lead-free faucet with vacuum breaker
- ☐ Double pantry washdown hose with lead-free vacuum breaker
- ☐ Double pantry pot filler with lead-free vacuum breaker

KELT SERIES – Electric Floor Mounted Tilting $\frac{2}{3}$ Jacketed Kettles

Approved by _____ Date _____ Approved by _____ Date _____

SERVICE CONNECTIONS

Electrical Connection: Single point supply 1½" (29 mm) dia. (¾" conduit).

TRUE WORKING CAPACITIES (IN 4 OZ. SERVINGS)

80 quarts/20 gallons/76 liters/640 servings

120 quarts/40 gallons/152 liters/1,280 servings







160 quarts/60 gallons/228 liters/1,920 servings

INSTALLATION MANUAL

NOTES

- Dimensions which locate the above connections have a tolerance of + or -3" (+ or -75 mm).
- Installation of backflow preventers, vacuum breakers and other specific code requirements is the responsibility of the owner and installer. It is the responsibility of the owner and installer to comply with local codes.
- This appliance is manufactured for commercial installation only and is not intended for home use.

Model	kW	Phase	Amperage per Line			Minimum Circuit Ampacity			Field Note
			208V	240V	480V	208V	240V	480V	
K20ELT	12	1	57.7	—	—	75	—	—	Electrical requirements must be specified upon order. This is not field convertible.
		3	33.3	—	14.4	45	—	20	
	16	1	—	66.7	—	—	85	—	
		3	—	38.5	—	—	50	—	
Standard K40ELT, K60ELT	18	3	50.0	43.3	21.7	65	55	30	

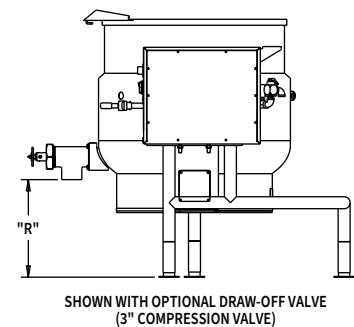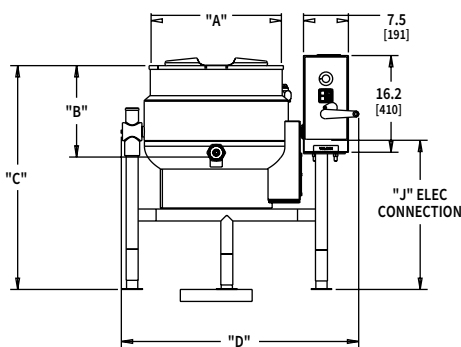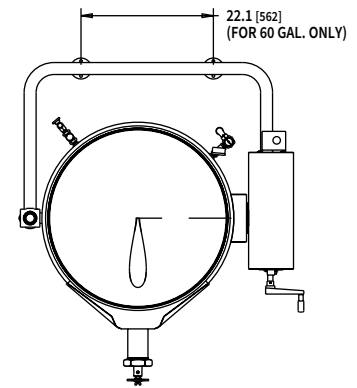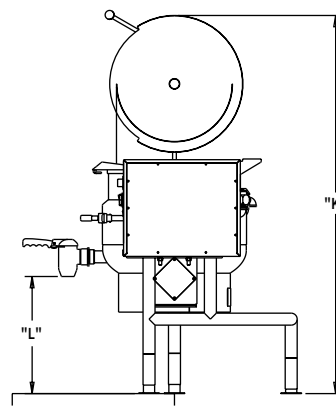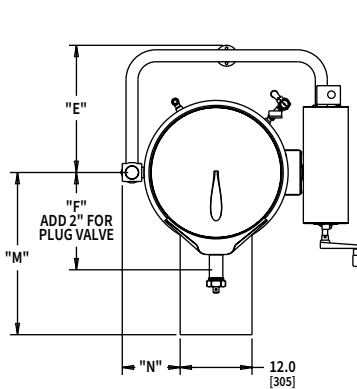

[CAD and/or Revit Files Available](#)

Model	True Working Capacity	A	B	C	D	E	F	G	H	J	K	L	M	N	R	S
K20ELT	20 gallons	21.8	15.4	37.4	39.7	21.3	16.3	20.5	13.6	24.9	63.2	19.6	27.1	9.7		25.1
	76 liters	554	391	950	1008	541	414	521	345	632	1605	498	688	246		638
K40ELT	40 gallons	25.8	21.2	39.7	43.5	24.0	18.1	16.9	12.0	22.9	69.4	16.0	32.1	11.7	15.9	30.1
	152 liters	655	538	1008	1105	610	460	429	305	582	1763	406	815	297	404	765
K60ELT	60 gallons	29.7	24.1	43.1	47.5	26.8	20.3	17.3	10.8	24.3	76.6	16.6	34.8	13.8	16.3	32.8
	227 liters	754	612	1095	1207	681	516	439	274	617	1946	422	884	351	414	833

As continued product improvement is a policy of Vulcan, specifications are subject to change without notice.