

SCH 65



127 lb Self-contained Ice Machine

Technical features

- Stainless steel bodywork
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Electronic PCB to create perfect cubes and help troubleshooting with alarm signals
- Scale tap
- Adjustable feeds
- Bin sensor termic
- Easy clean spray system
- R290 condenser



Internal bin capacity



48.5 lb of ice

1100 cubes

Type of ice

Full Cubes



20 g

34 mm



30 mm



Voltage

115/60/1 Standard version

Machine dimensions

Exterior dimensions	18.2x22.4x35.3 in
WxDxH Product Weight	86.0 lb
Shipping Dimensions	21.3x25.2x35.4 in
Shipping Weight (approx.)	99.2 lb

Technology and Certifications



FOOD SERVICE SOLUTIONS INC.
 2-6599 Kitimat Road
 Mississauga, ON
 L5N 4J4
 (800) 668-8765
 e-mail: info@myfss.ca



SCH 65

SIMAG
by Scotsman

127 lb Self-contained Ice Machine

Accessories

- Scoop
- Hose set tubes
- Drain tube
- Legs
- Floor mount kit to be provided with the unit to be ordered as accessory (SCKITFLOOR5CH50)

Warranty


- 3 years parts and labor costs
- 5 years warranty on compressor



SCH 65



127 lb Self-contained Ice Machine

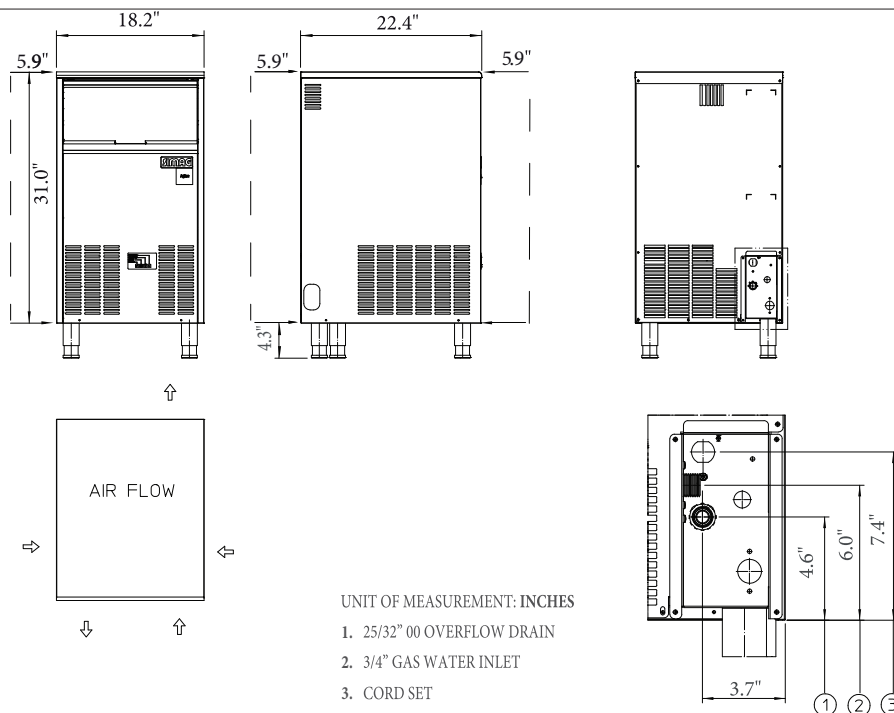

DRAINAGE PER GRAVITY

Recommended breaker size: 15 amp
 plug type: nema 5-15 p

Operating Limits

	Minimum	Maximum
Ambient temperature	50°F (10°C)	100°F (38°C)
Water temperature	40°F (5°C)	100°F (38°C)
Water pressure	1 bar (14 PSI)	5 bar (70 PSI)
Clearance (right and left)	6 in (15 cm)	-

Specifications and design are subject to change without notice
 Note: if clearance is less, ice production will decrease up to 20/25%

Model	Voltage	Daily production lb		Daily production kg		Power input Watt (*)	Refrigerant	Fuse A	Consumptions (**)			
		21/10°C 70/50°F	32/21°C 90/70°F	21/10°C 70/50°F	32/21°C 90/70°F				kJ/kg	kWh/100lb	l/kg	Water gal/100lb
SCH 65 A	115/60/1	127	101	57.5	127	560	R290	10	755	9.51	2.9	35

(*) Power Input: at 90°F Ambient Temperature
 (**) Water Consumption: at 90°F Air and 70°F Water