

Single & Double Stock Pot Stoves

Standard Features

- Stainless steel sides and front valve cover
- Full width, removable stainless steel drip pan for easy cleanup
- Heavy duty cast iron top grates
- Heavy duty cast iron three-ring burner, rated at a total of 80,000 BTU/hr
- Cast iron burners and top grates
- Stainless steel tubing for pilots and pilot tips per burner ring
- Each burner is equipped with two continuous pilots
- Two manual controls to operate the inner and outer rings independently
- Stainless steel legs standard
- 3/4" NPT rear gas connection and regulator standard

MODELS:

ATSP-18-1 / ATSP-18-2 / ATSP-18-1L / ATSP-18-2L

ATSP-18-1



ATSP-18-1L



ATSP-18-2



ATSP-18-2L



1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)




Conforms to ANSI
STD Z83.11b-2009 (2011)
Certified to CSA
STD 1.8B-2009 (2011)
Conforms to NSF/ANSI STD.4




SPECIFICATIONS

Models	Burners and control method	Gas type	Intake-tube pressure(in.W.C.)	Per BTU B.T.U./h	Total BTU B.T.U./h	Regulator	Net weight(lbs)	Gross weight(lbs)
ATSP-18-1	2 Burners Independent Manual Control	NG	4	40,000	80,000	4" w.c.	105.8	119
		LP	10	40,000	80,000	10" w.c.		
ATSP-18-2	4 Burners Independent Manual Control	NG	4	40,000	160,000	4" w.c.	201.7	221.6
		LP	10	40,000	160,000	10" w.c.		
ATSP-18-1L	2 Burners Independent Manual Control	NG	4	40,000	80,000	4" w.c.	103.6	116.8
		LP	10	40,000	80,000	10" w.c.		
ATSP-18-2L	4 Burners Independent Manual Control	NG	4	40,000	160,000	4" w.c.	198.4	220.5
		LP	10	40,000	160,000	10" w.c.		



PLAN VIEW

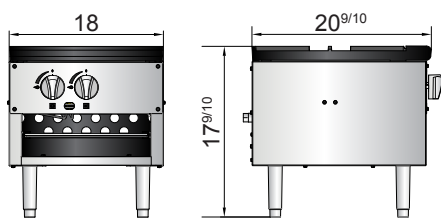


ATSP-18-1L

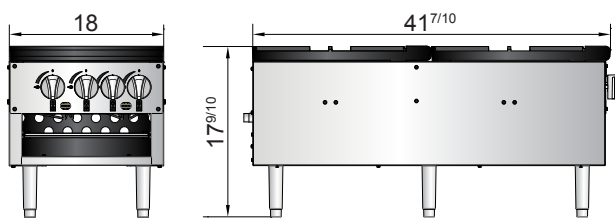

ATSP-18-2L

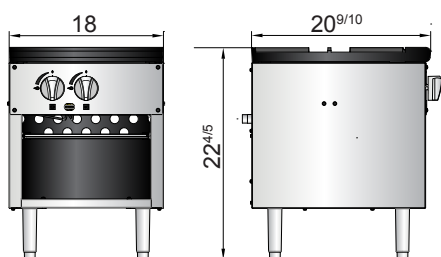

ATSP-18-1

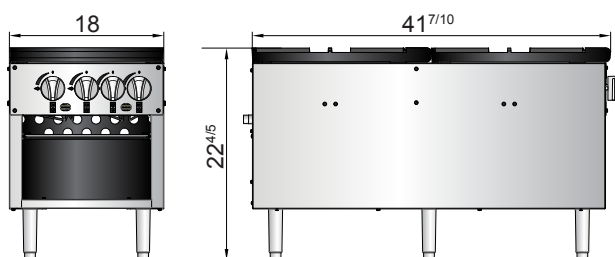

ATSP-18-2

