


Blast Chillers

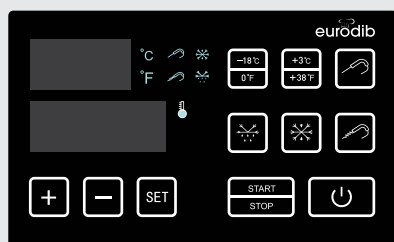

Rapid Cooling Rapid Freezing

- Ensures food safety
- Maintains food quality
- Accelerates food preparation

Chilling or Freezing cycles can be set according to time, temperature inside the cabinet or via probe inserted to the core of the product. Probe included.

POWER

REFRIGERATED POWER

REFRIGERANT GAS

EXTERIOR DIM. (L x W x H)

CHAMBER DIM. (L x W x H)

TRAY CAPACITY (L x W)*

TRAY HEIGHT

TOTAL VOLUME CAP.

CHILLING CAPACITY



FREEZING CAPACITY



NET WEIGHT

SHIP DIM. (L x W x H)

SHIP WEIGHT

EcoBlast320

110-120V, 660W, 6.4A,
1HP, 5-15P

2559 BTU/hr, 660W

R290

29.5" x 29.5" x 35"

24.5" x 16" x 14.75"

5 x (12.8" x 20.8")

1.6" - 2.6"

3.4 Cu Ft (96 L)

90°C to 3°C (197°F to 37°F)
= 14 kg (31 lb) 90 mins

90°C to -18°C (197°F to 0°F)
= 12 kg (26.5 lb) 240 mins

152 lb

35.5" x 35.5" x 40.25"

201 lb

EcoBlast620

110-120V, 1350W, 12.5A,
2HP, 5-15P

5118 BTU/hr, 1300W

R290

31" x 30.5" x 61.5"

25.5" x 16" x 41"

10 x (12.8" x 20.8")

1.6" - 2.6"

9.75 Cu Ft (276 L)

90°C to 3°C (197°F to 37°F)
= 40 kg (88 lb) 90 mins

90°C to -18°C (197°F to 0°F)
= 35 kg (77 lb) 240 mins

276 lb

35.5" x 35.5" x 69"

335 lb

* Trays included

Ambient temperature of 86 °F (30 °C); Evap. -40 °F/°C; Cond. 104 °F (45 °C); 65 % Relative humidity



* complies
with HACCP
standards



Intertek
4003219




Intertek




5-15P

Blast Chillers

EcoBlast320

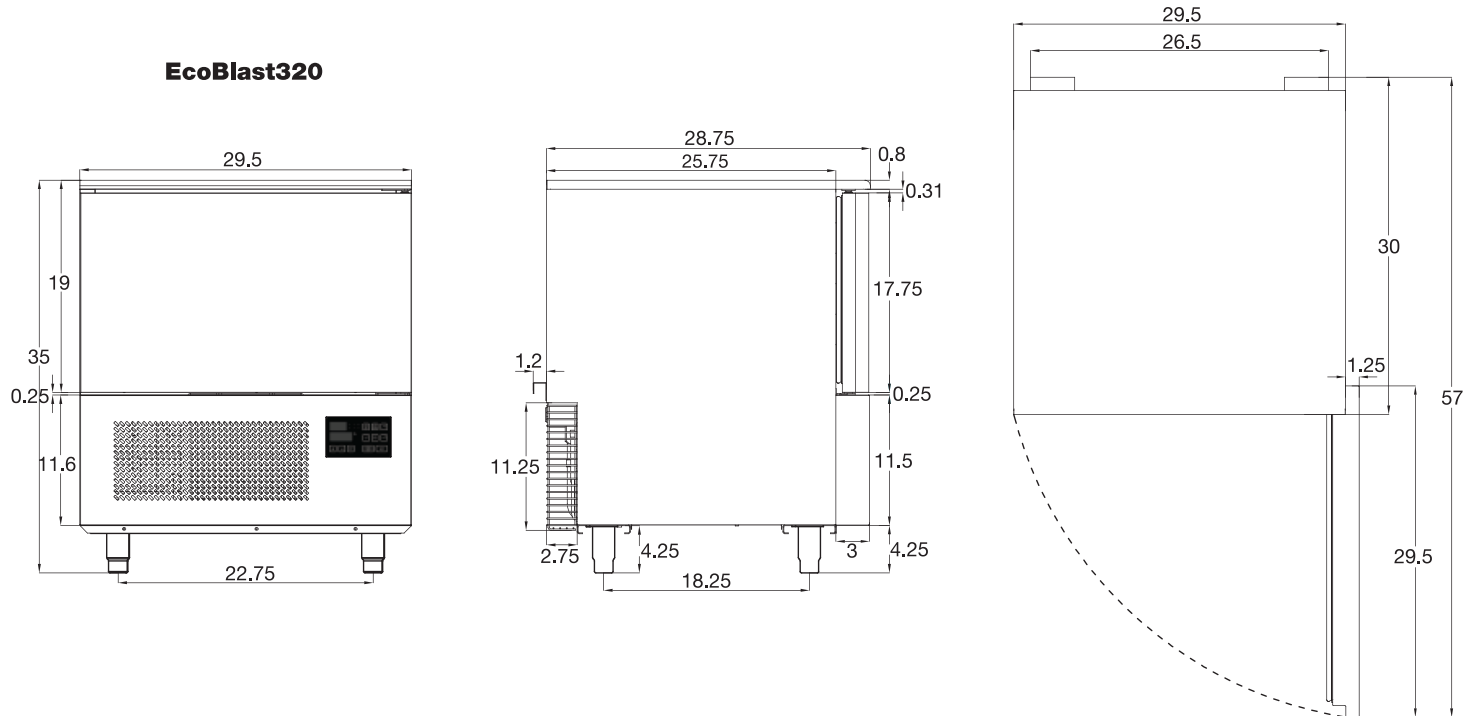

EcoBlast620

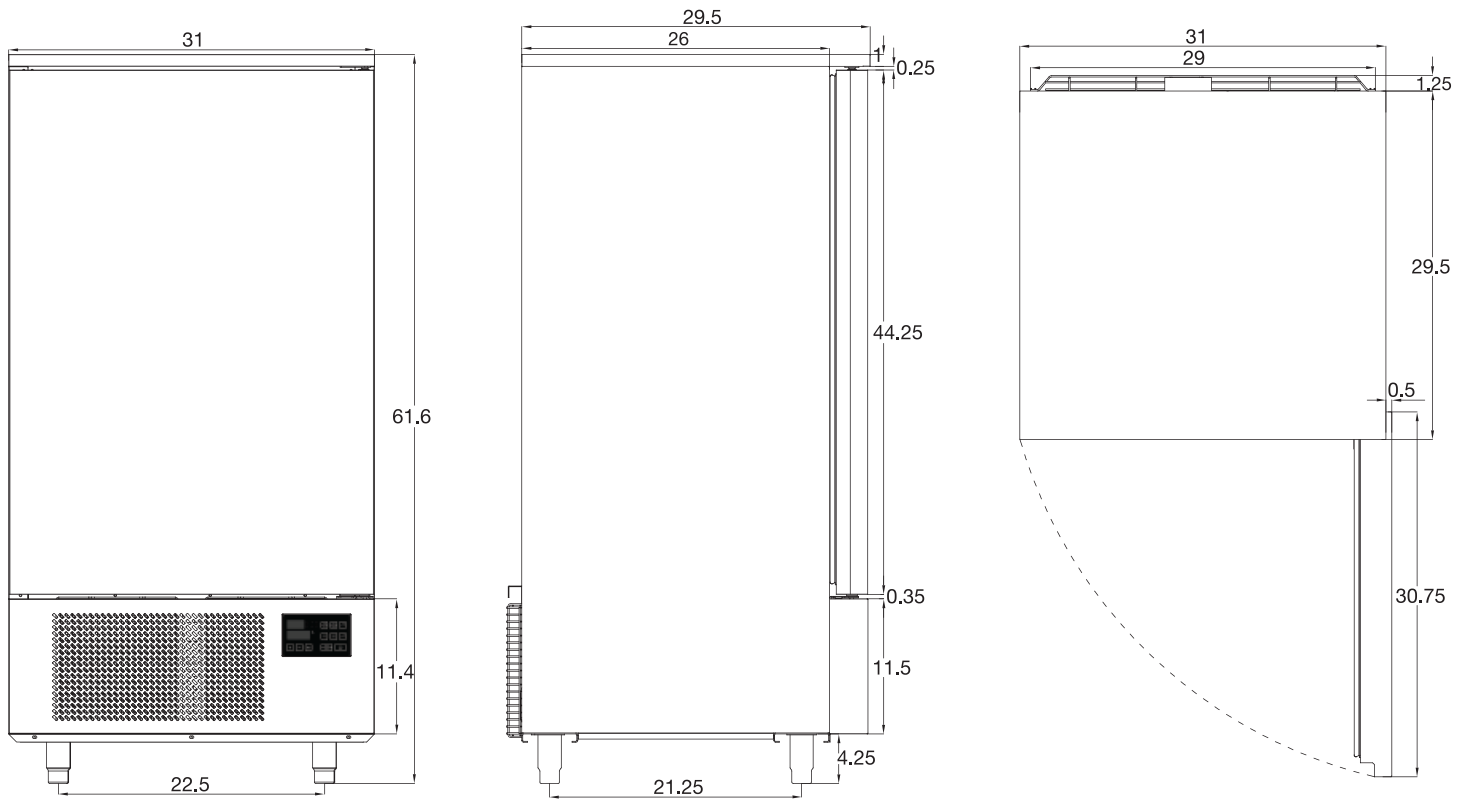

Dimensions expressed in inches