

### IF-40

### **40 LB Fryer**

The Inferno fryer features cast iron burners that provide even heat distribution across a large area. Its durable temperature probe quickly responds to temperature changes, providing a quick recovery time. Operating temperatures range from 200°F to 400°F with a millivolt safety control system. A large cold zone allows sediment to be easily separated out, maintaining oil quality and life span.



#### **Features**


- Cast iron burners
- Stainless steel tank
- Durable temperature probe
- Quick recovery time
- Operating temperatures from 200°F to 400°F
- Safety valve with automatic voltage stabilizing function
- · Large cool zone to extend oil life
- Available in natural gas or liquid propane
- 1 year parts and labour warranty





# IF-40

## **40 LB Fryer**

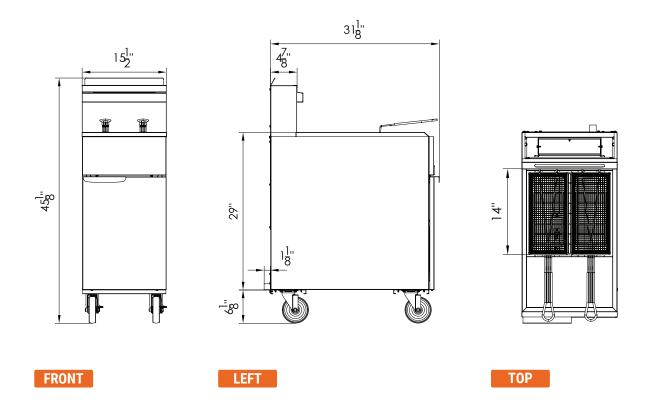

| Model | External Dimensions (inches) |        |        | Crated Dimensions<br>(inches) |        |        | Net Weight | Gross Weight | Gas Source | Burner Count | Single Burner | Total Output<br>(BTU) | Orifice Size | Gas Pressure | Oil Tank<br>Capacity |
|-------|------------------------------|--------|--------|-------------------------------|--------|--------|------------|--------------|------------|--------------|---------------|-----------------------|--------------|--------------|----------------------|
|       | W                            | D      | Н      | W                             | D      | Н      |            |              |            |              |               | , ,                   |              |              |                      |
| IF-40 | 15 1/2                       | 32 7/8 | 45 1/8 | 17 7/8                        | 35 3/8 | 37 5/8 | 165.35     | 187.39       | LPG        | 3            | 30000         | 90000                 | 52           | 10 in. WC    | 40                   |
|       |                              |        |        |                               |        |        |            |              | NAT        | 3            | 30000         | 90000                 | 39           | 4 in. WC     | 40                   |

Specifications are subject to change without notice.