

IF-50

50 LB Fryer

The Inferno fryer features cast iron burners that provide even heat distribution across a large area. Its durable temperature probe quickly responds to temperature changes, providing a quick recovery time. Operating temperatures range from 200°F to 400°F with a millivolt safety control system. A large cold zone allows sediment to be easily separated out, maintaining oil quality and life span.



Features


- Cast iron burners
- Stainless steel tank
- Durable temperature probe
- Quick recovery time
- Operating temperatures from 200°F to 400°F
- Safety valve with automatic voltage stabilizing function
- · Large cool zone to extend oil life
- Available in natural gas or liquid propane
- 1 year parts and labour warranty





IF-50

50 LB Fryer

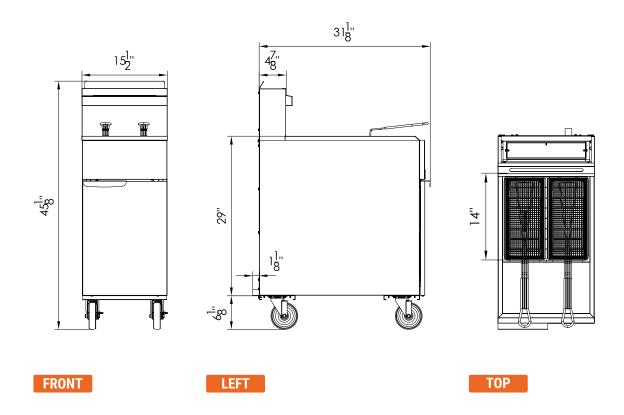

| Model | External Dimensions (inches) | | | Crated Dimensions (inches) | | | Net Weight | Gross Weight | Gas Source | Burner Count | Single Burner | Total Output (BTU) | Orifice Size | Gas Pressure | Oil Tank Capacity |
|-------|---------------------------------|--------|--------|-------------------------------|--------|--------|------------|--------------|------------|--------------|---------------|-----------------------|--------------|--------------|----------------------|
| | W | D | Н | W | D | Н | | | | | | , , , | | | , |
| IF-50 | 15 1/2 | 32 7/8 | 45 1/8 | 17 7/8 | 35 3/8 | 37 5/8 | 176.35 | 198.42 | LPG | 4 | 30000 | 120000 | 52 | 10 in. WC | 50 |
| | | | | | | | | | NAT | 4 | 30000 | 120000 | 39 | 4 in. WC | 50 |

Specifications are subject to change without notice.

